

中和全盛UPS电源

ZHONGHE QUANSHENG UPS POWER SUPPLY

电池系列 2V / 12V



产品特点

PRODUCT FEATURES

- 1、ABS结构，不漏液
- 2、低自放电率，可防火
- 3、可多方位安装使用
- 4、高品质 AGM隔膜和铅钙合金极板
- 5、工作温度范围广：-15 ~ 40


应用行业：

- 1、不间断电源供应
- 2、备用电源供应
- 3、应急照明
- 4、电动工具和电力站
- 5、交通
- 6、安防和网络通讯系统等




放电特性

Discharge Characteristics

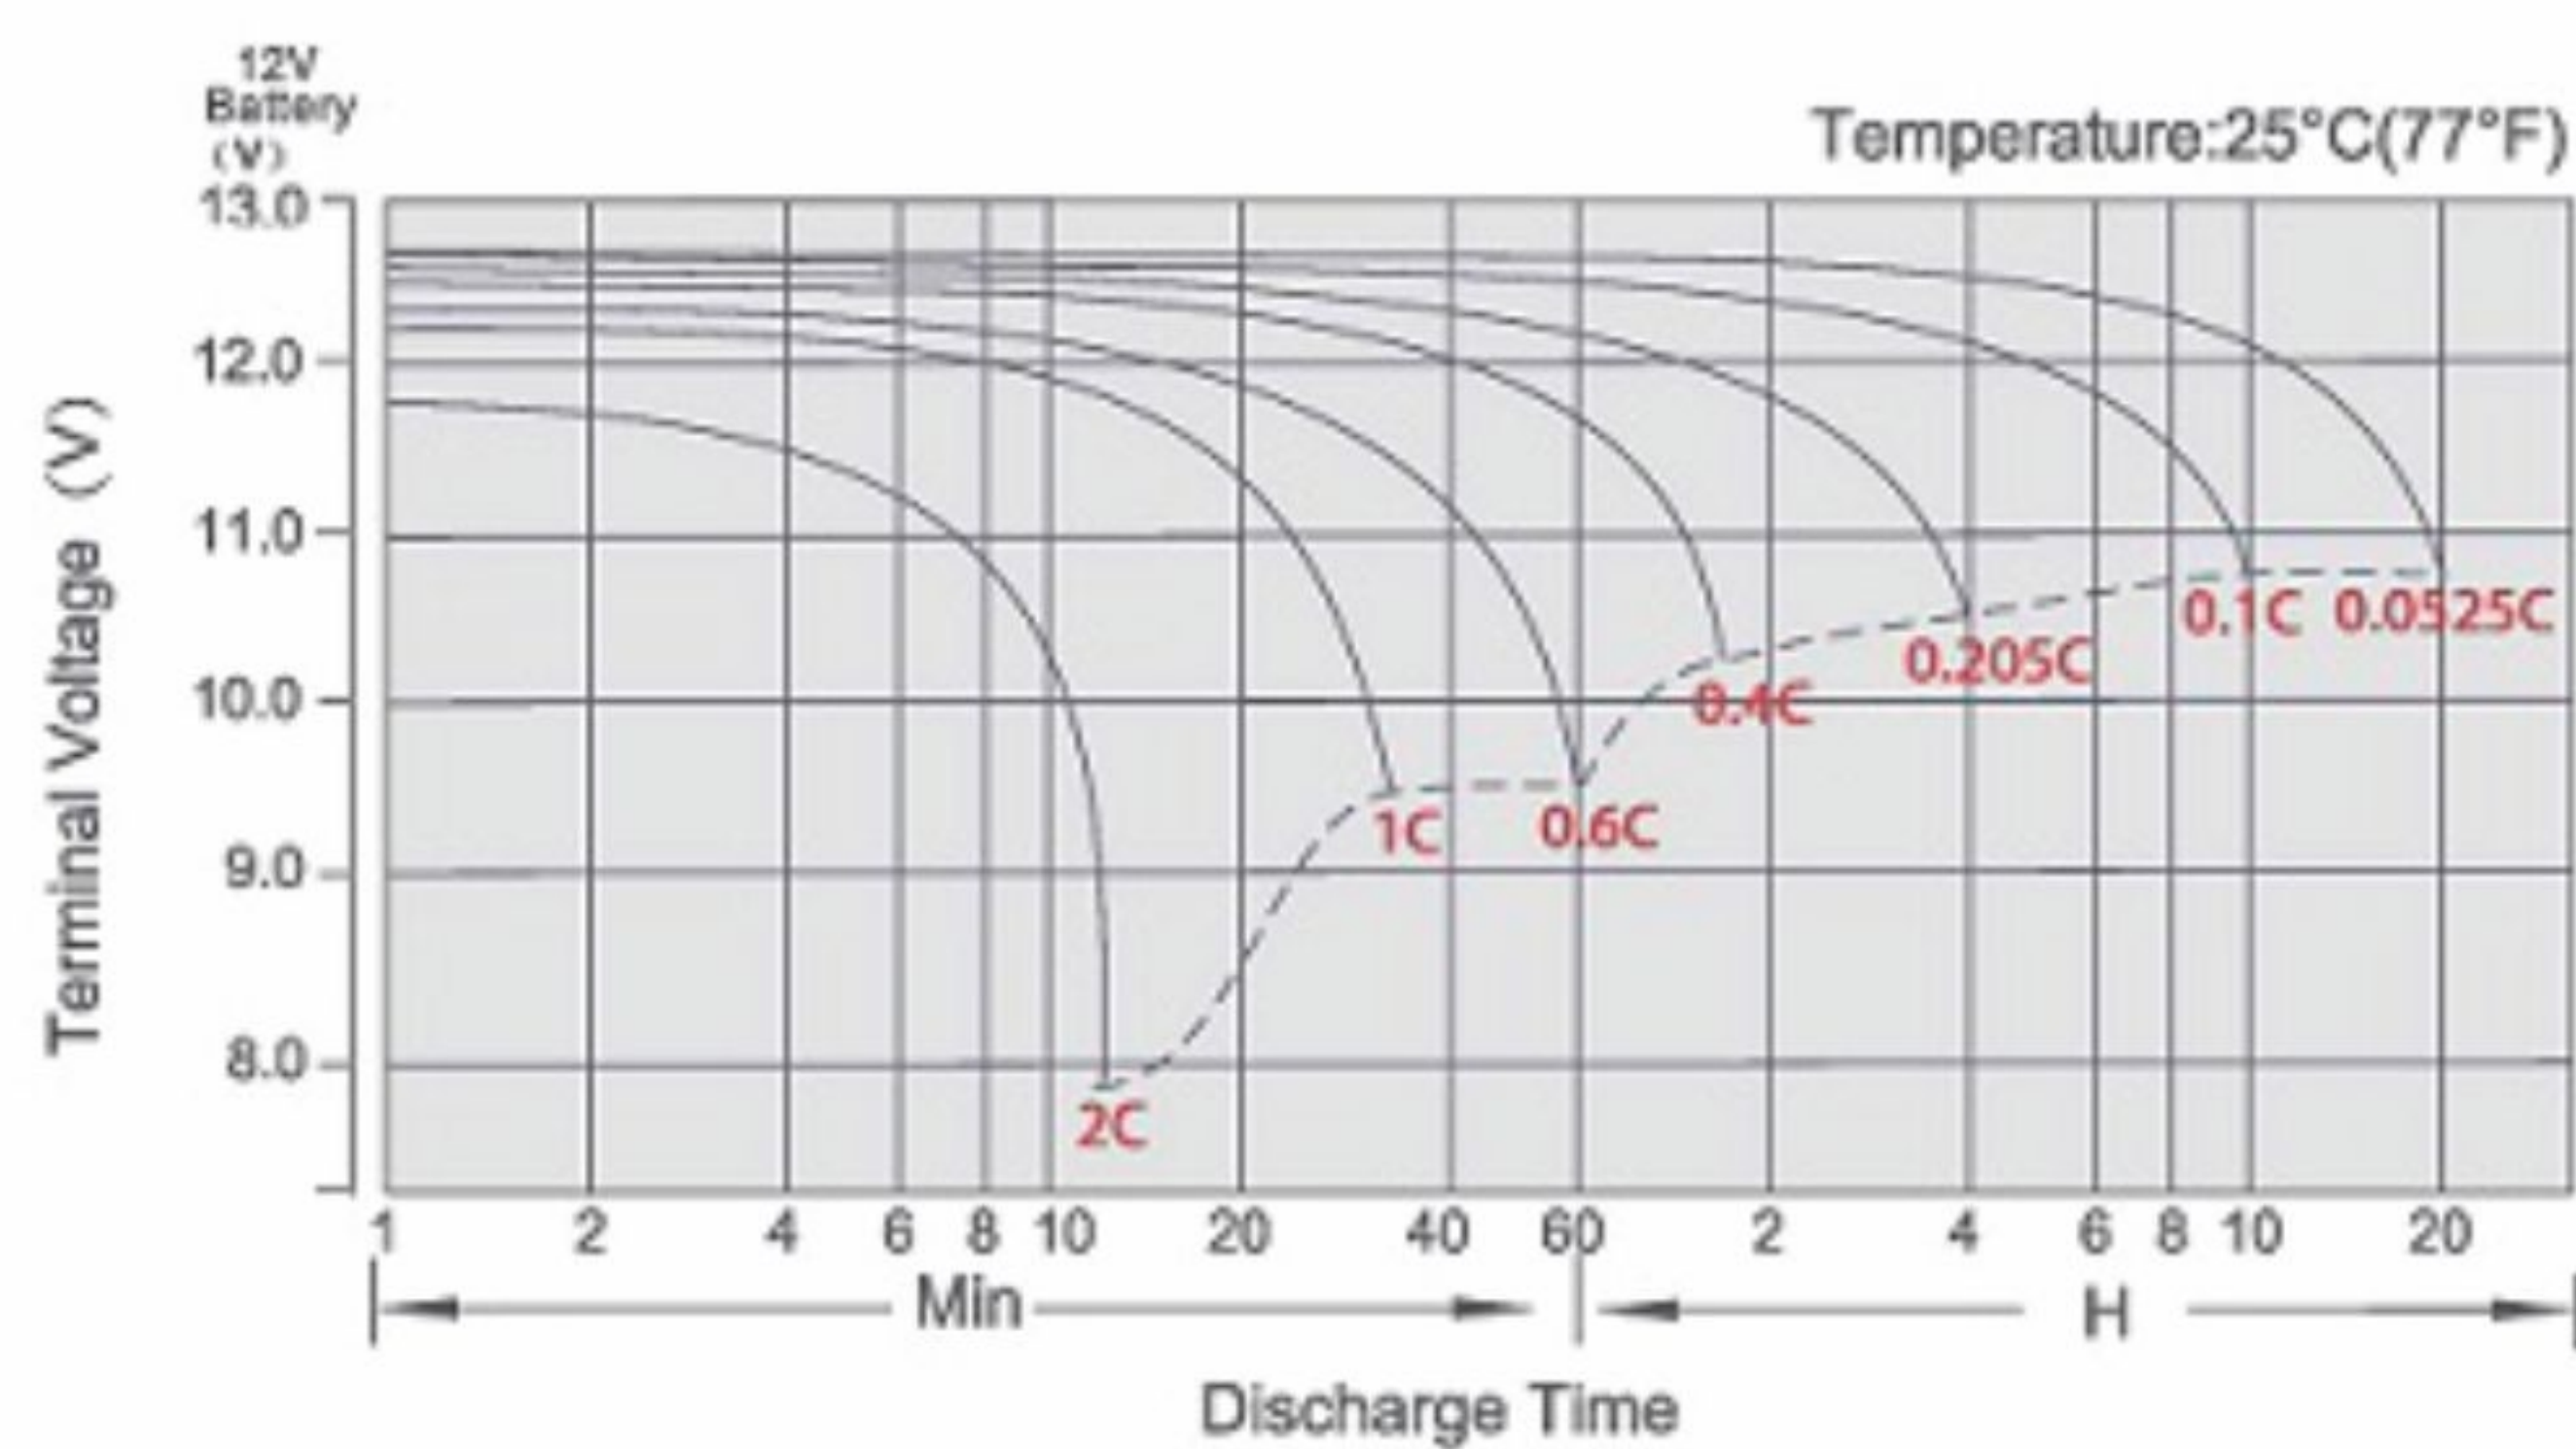


浮充特性

Float Charging Characteristics

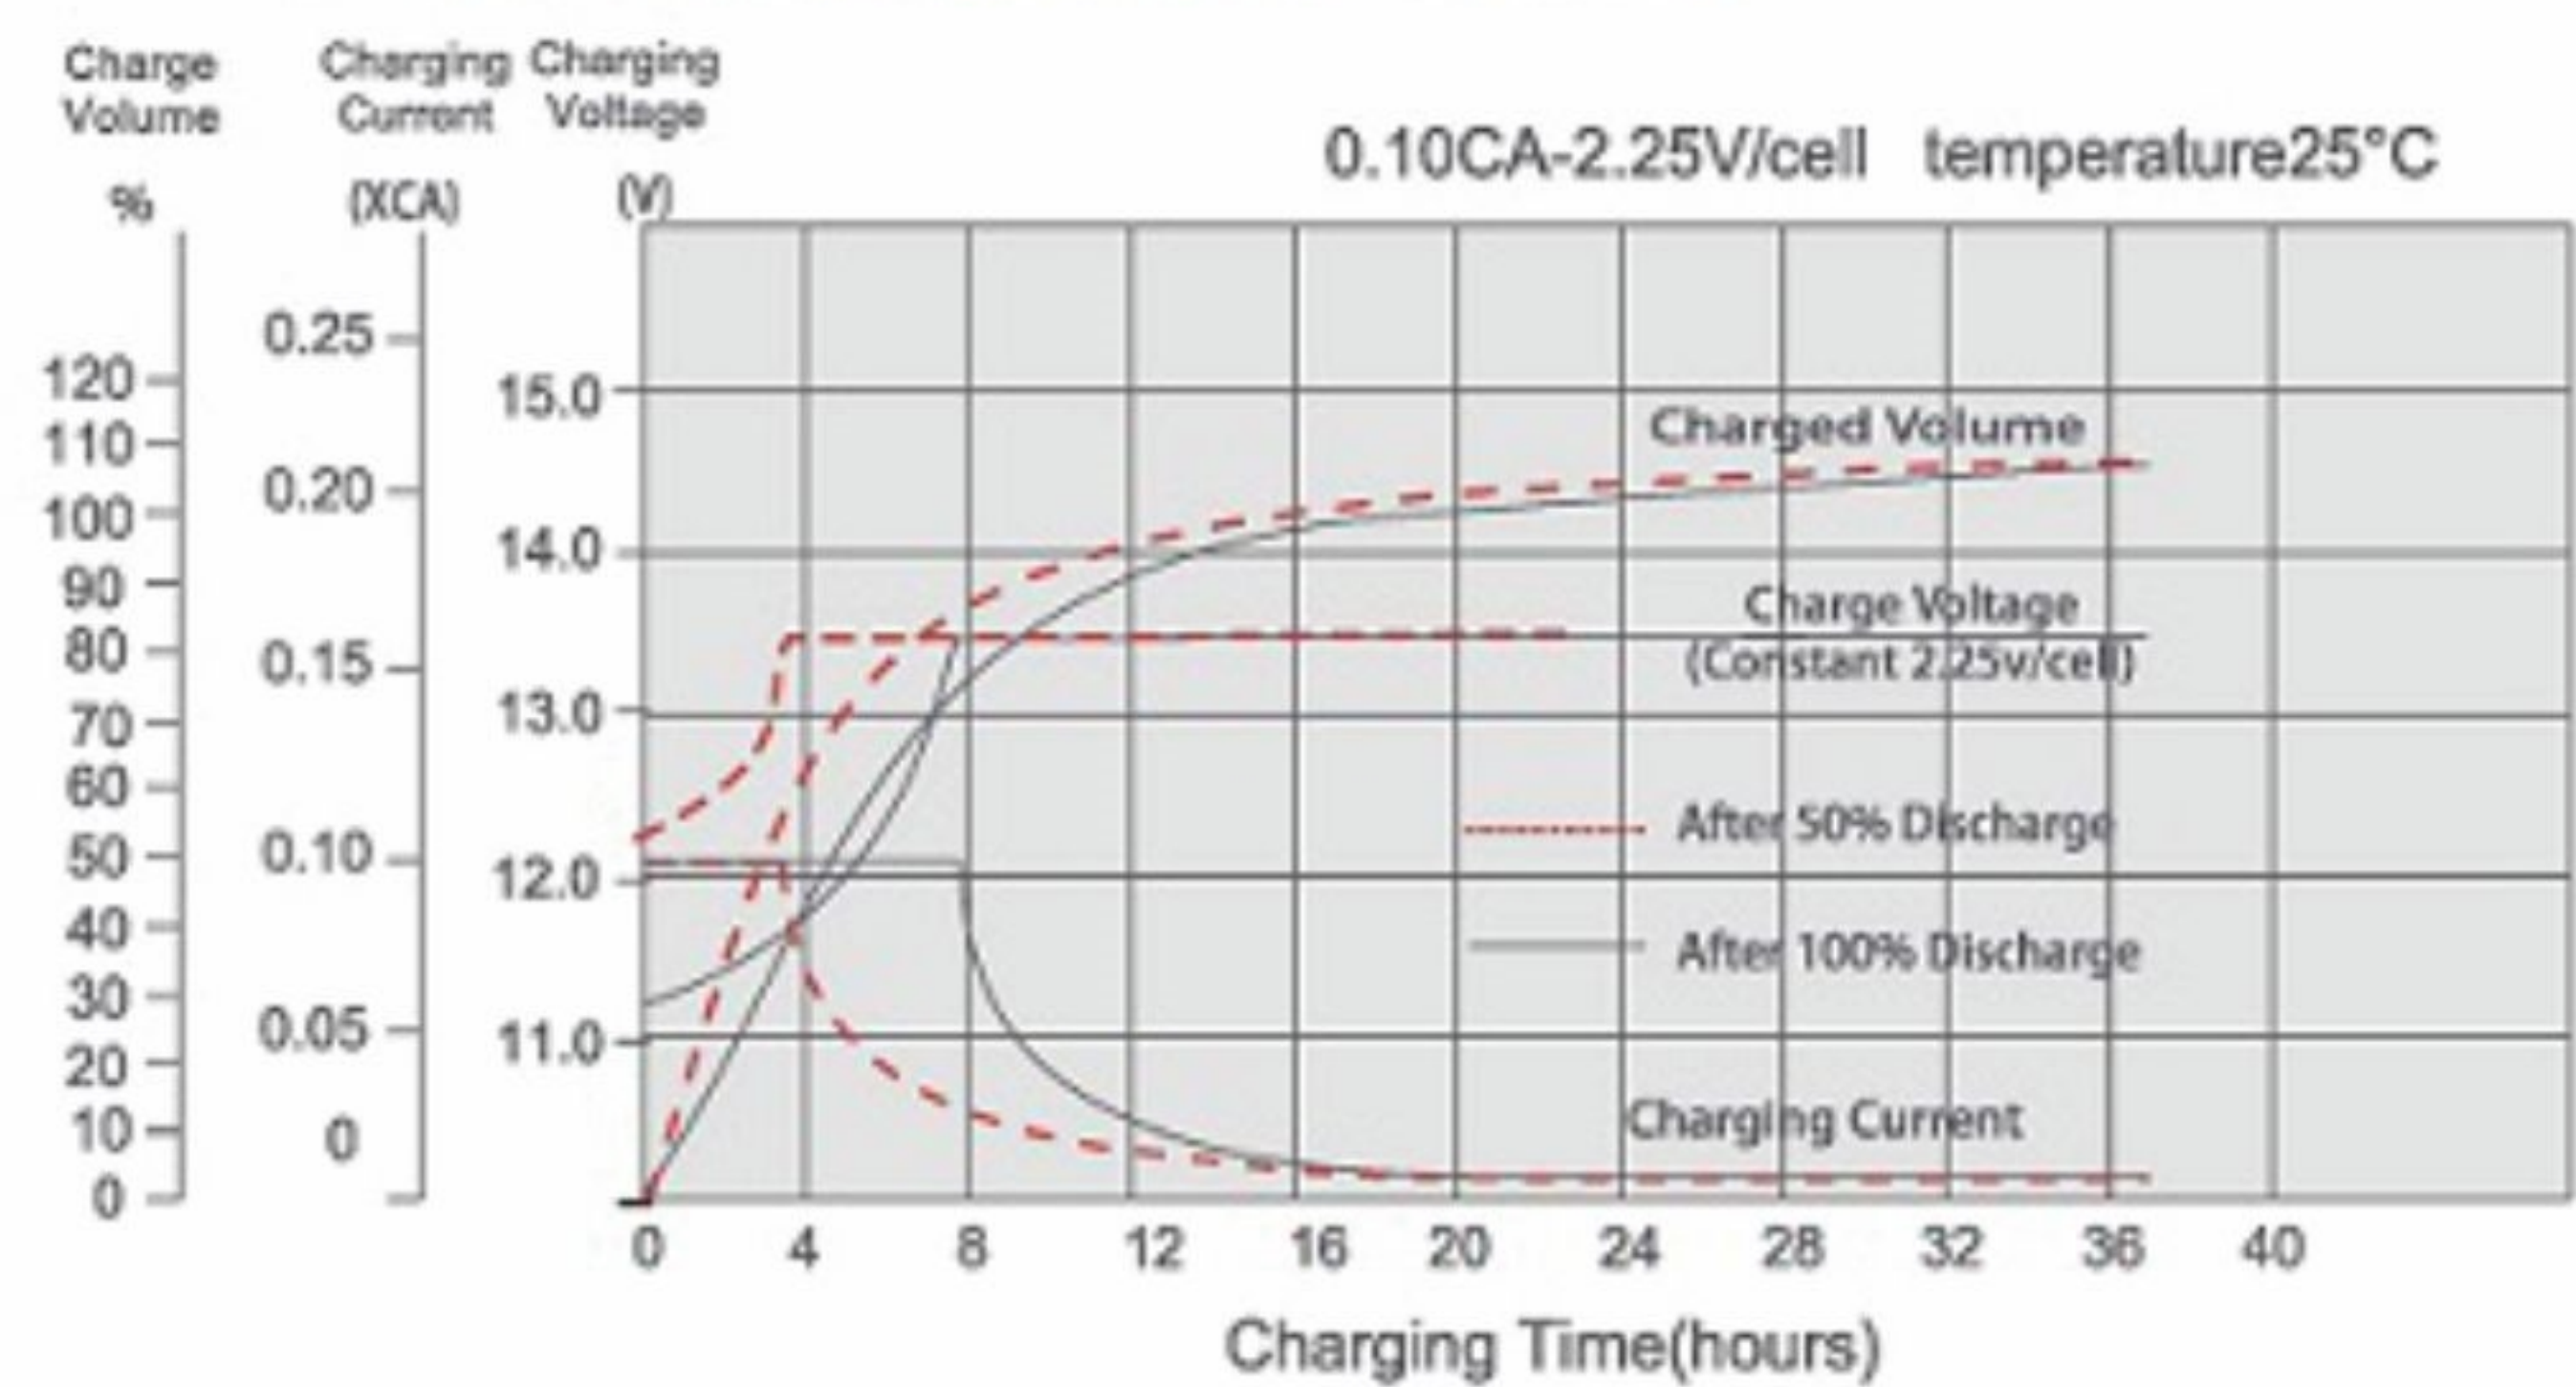


温度与容量关系

Temperature Effects in Relation to Battery Capacity

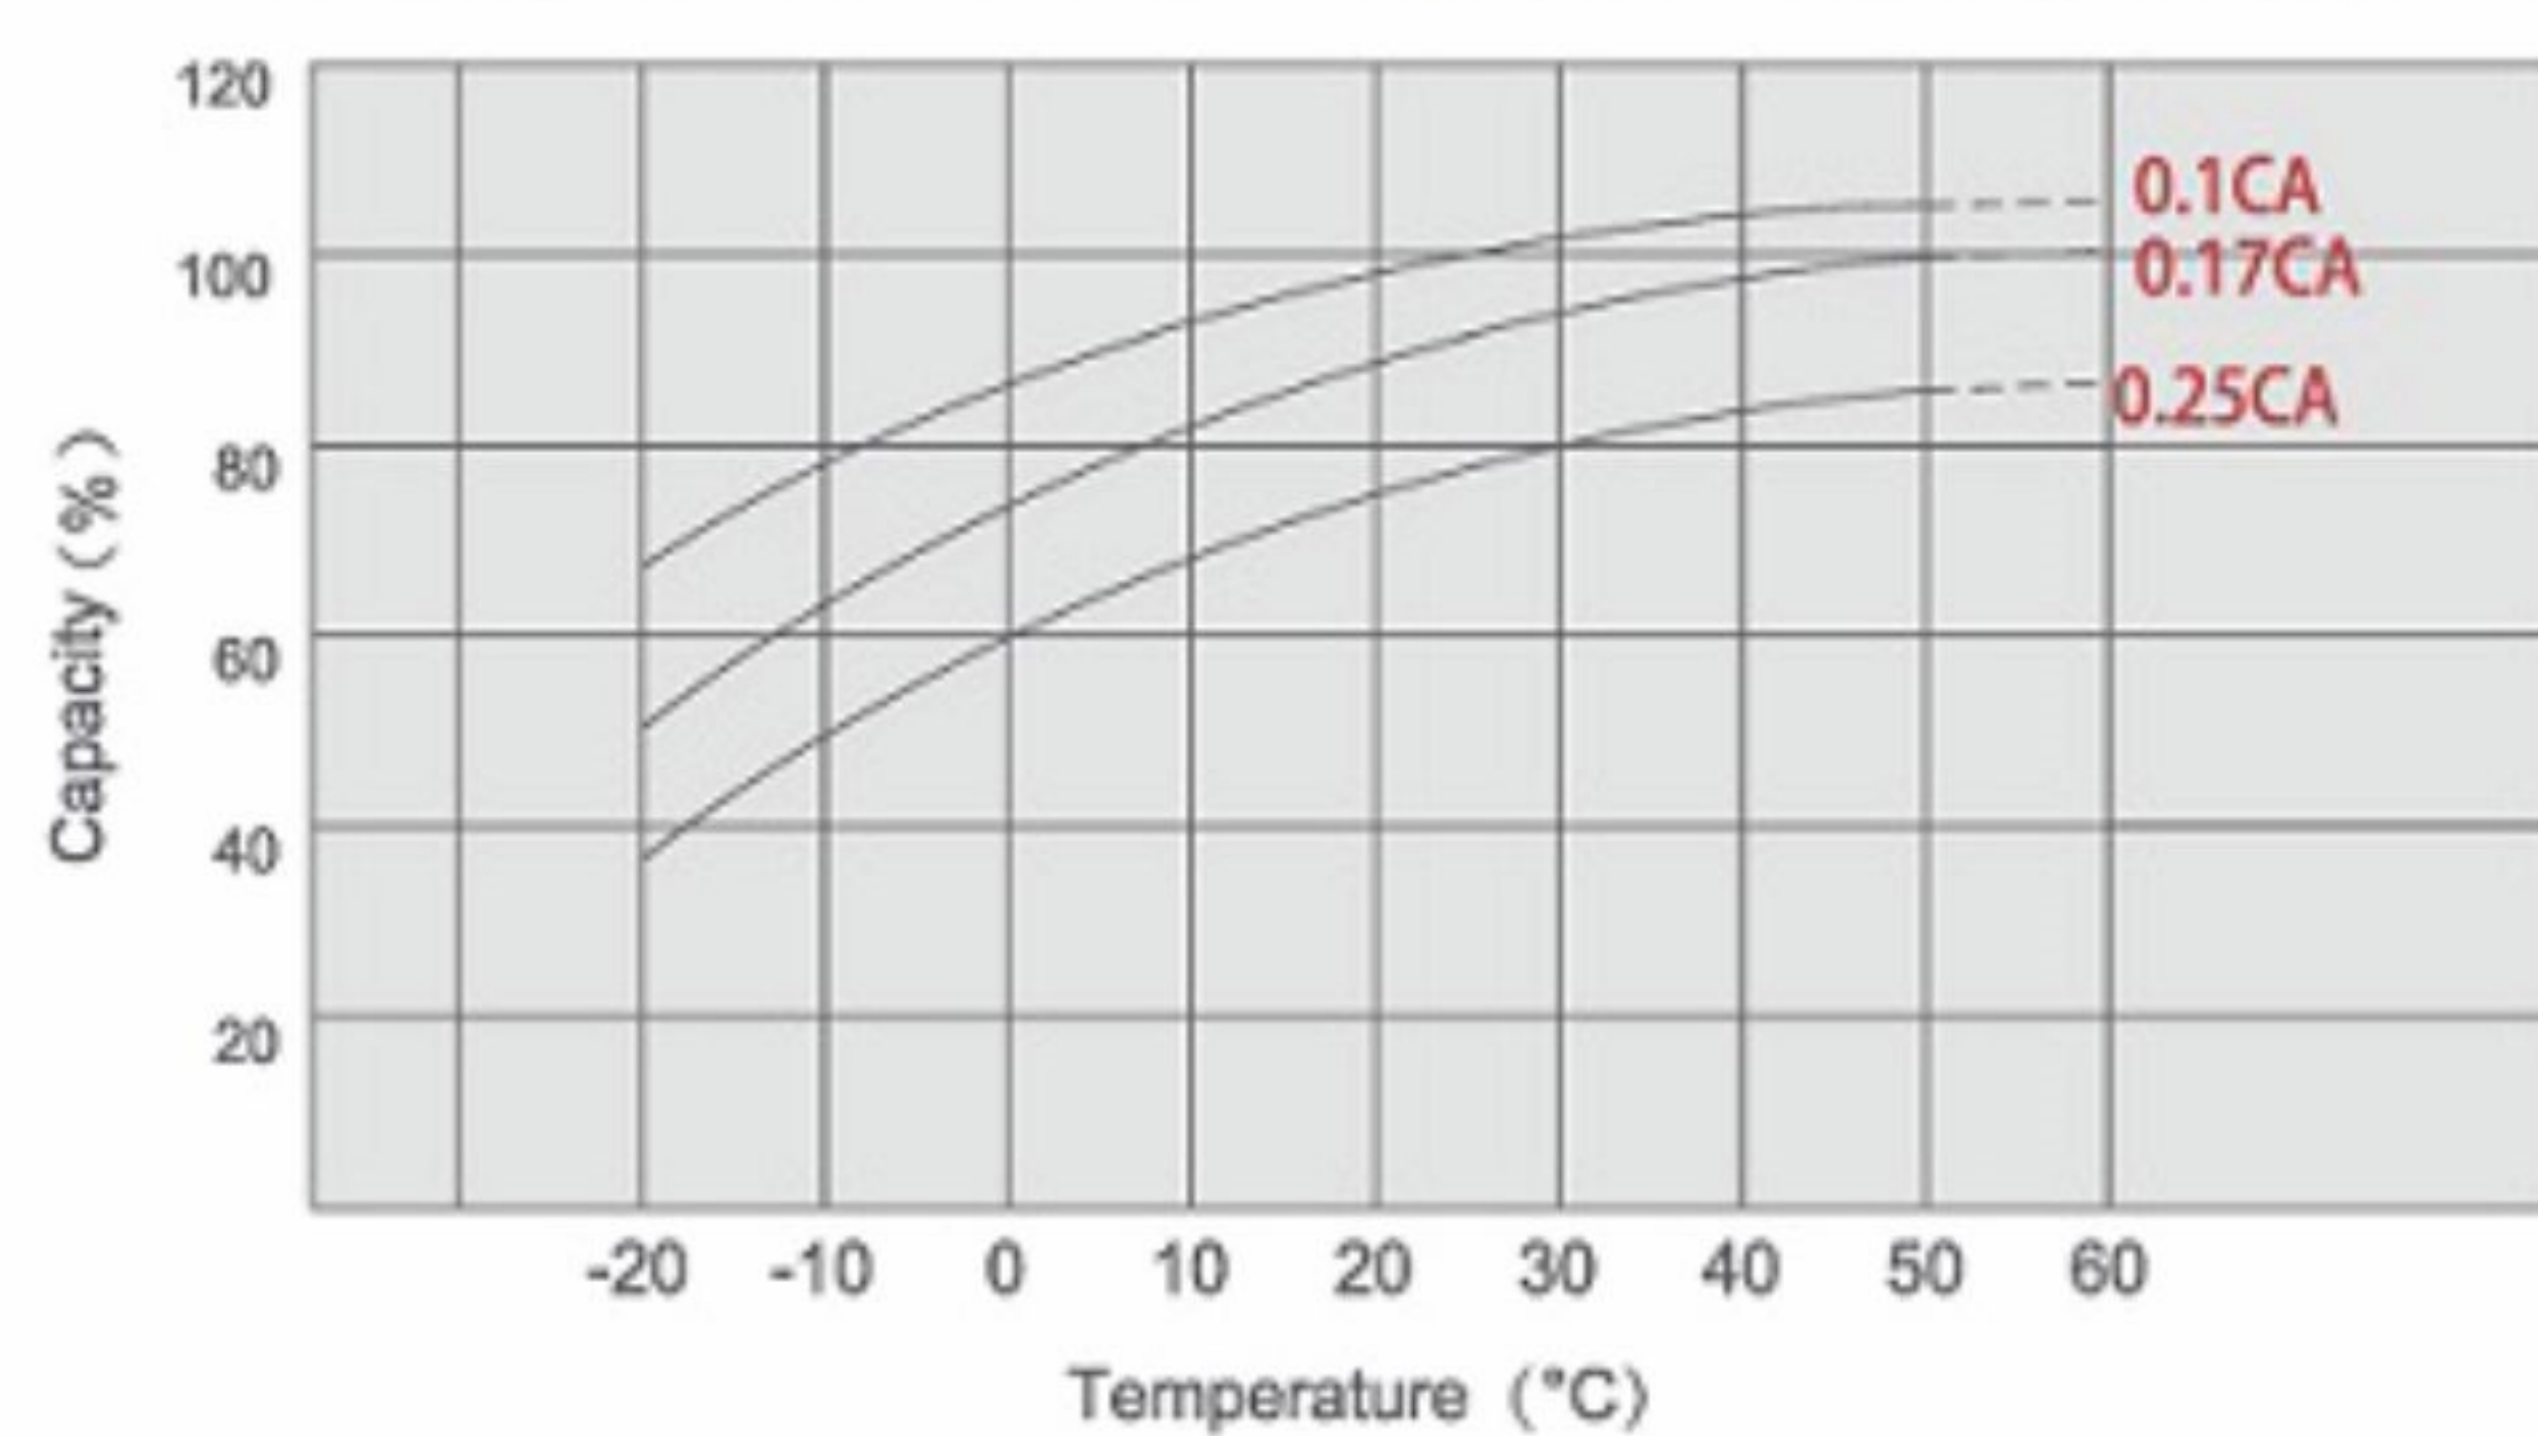


温度与浮充寿命关系

Effect of Temperature on Long Term Float Life

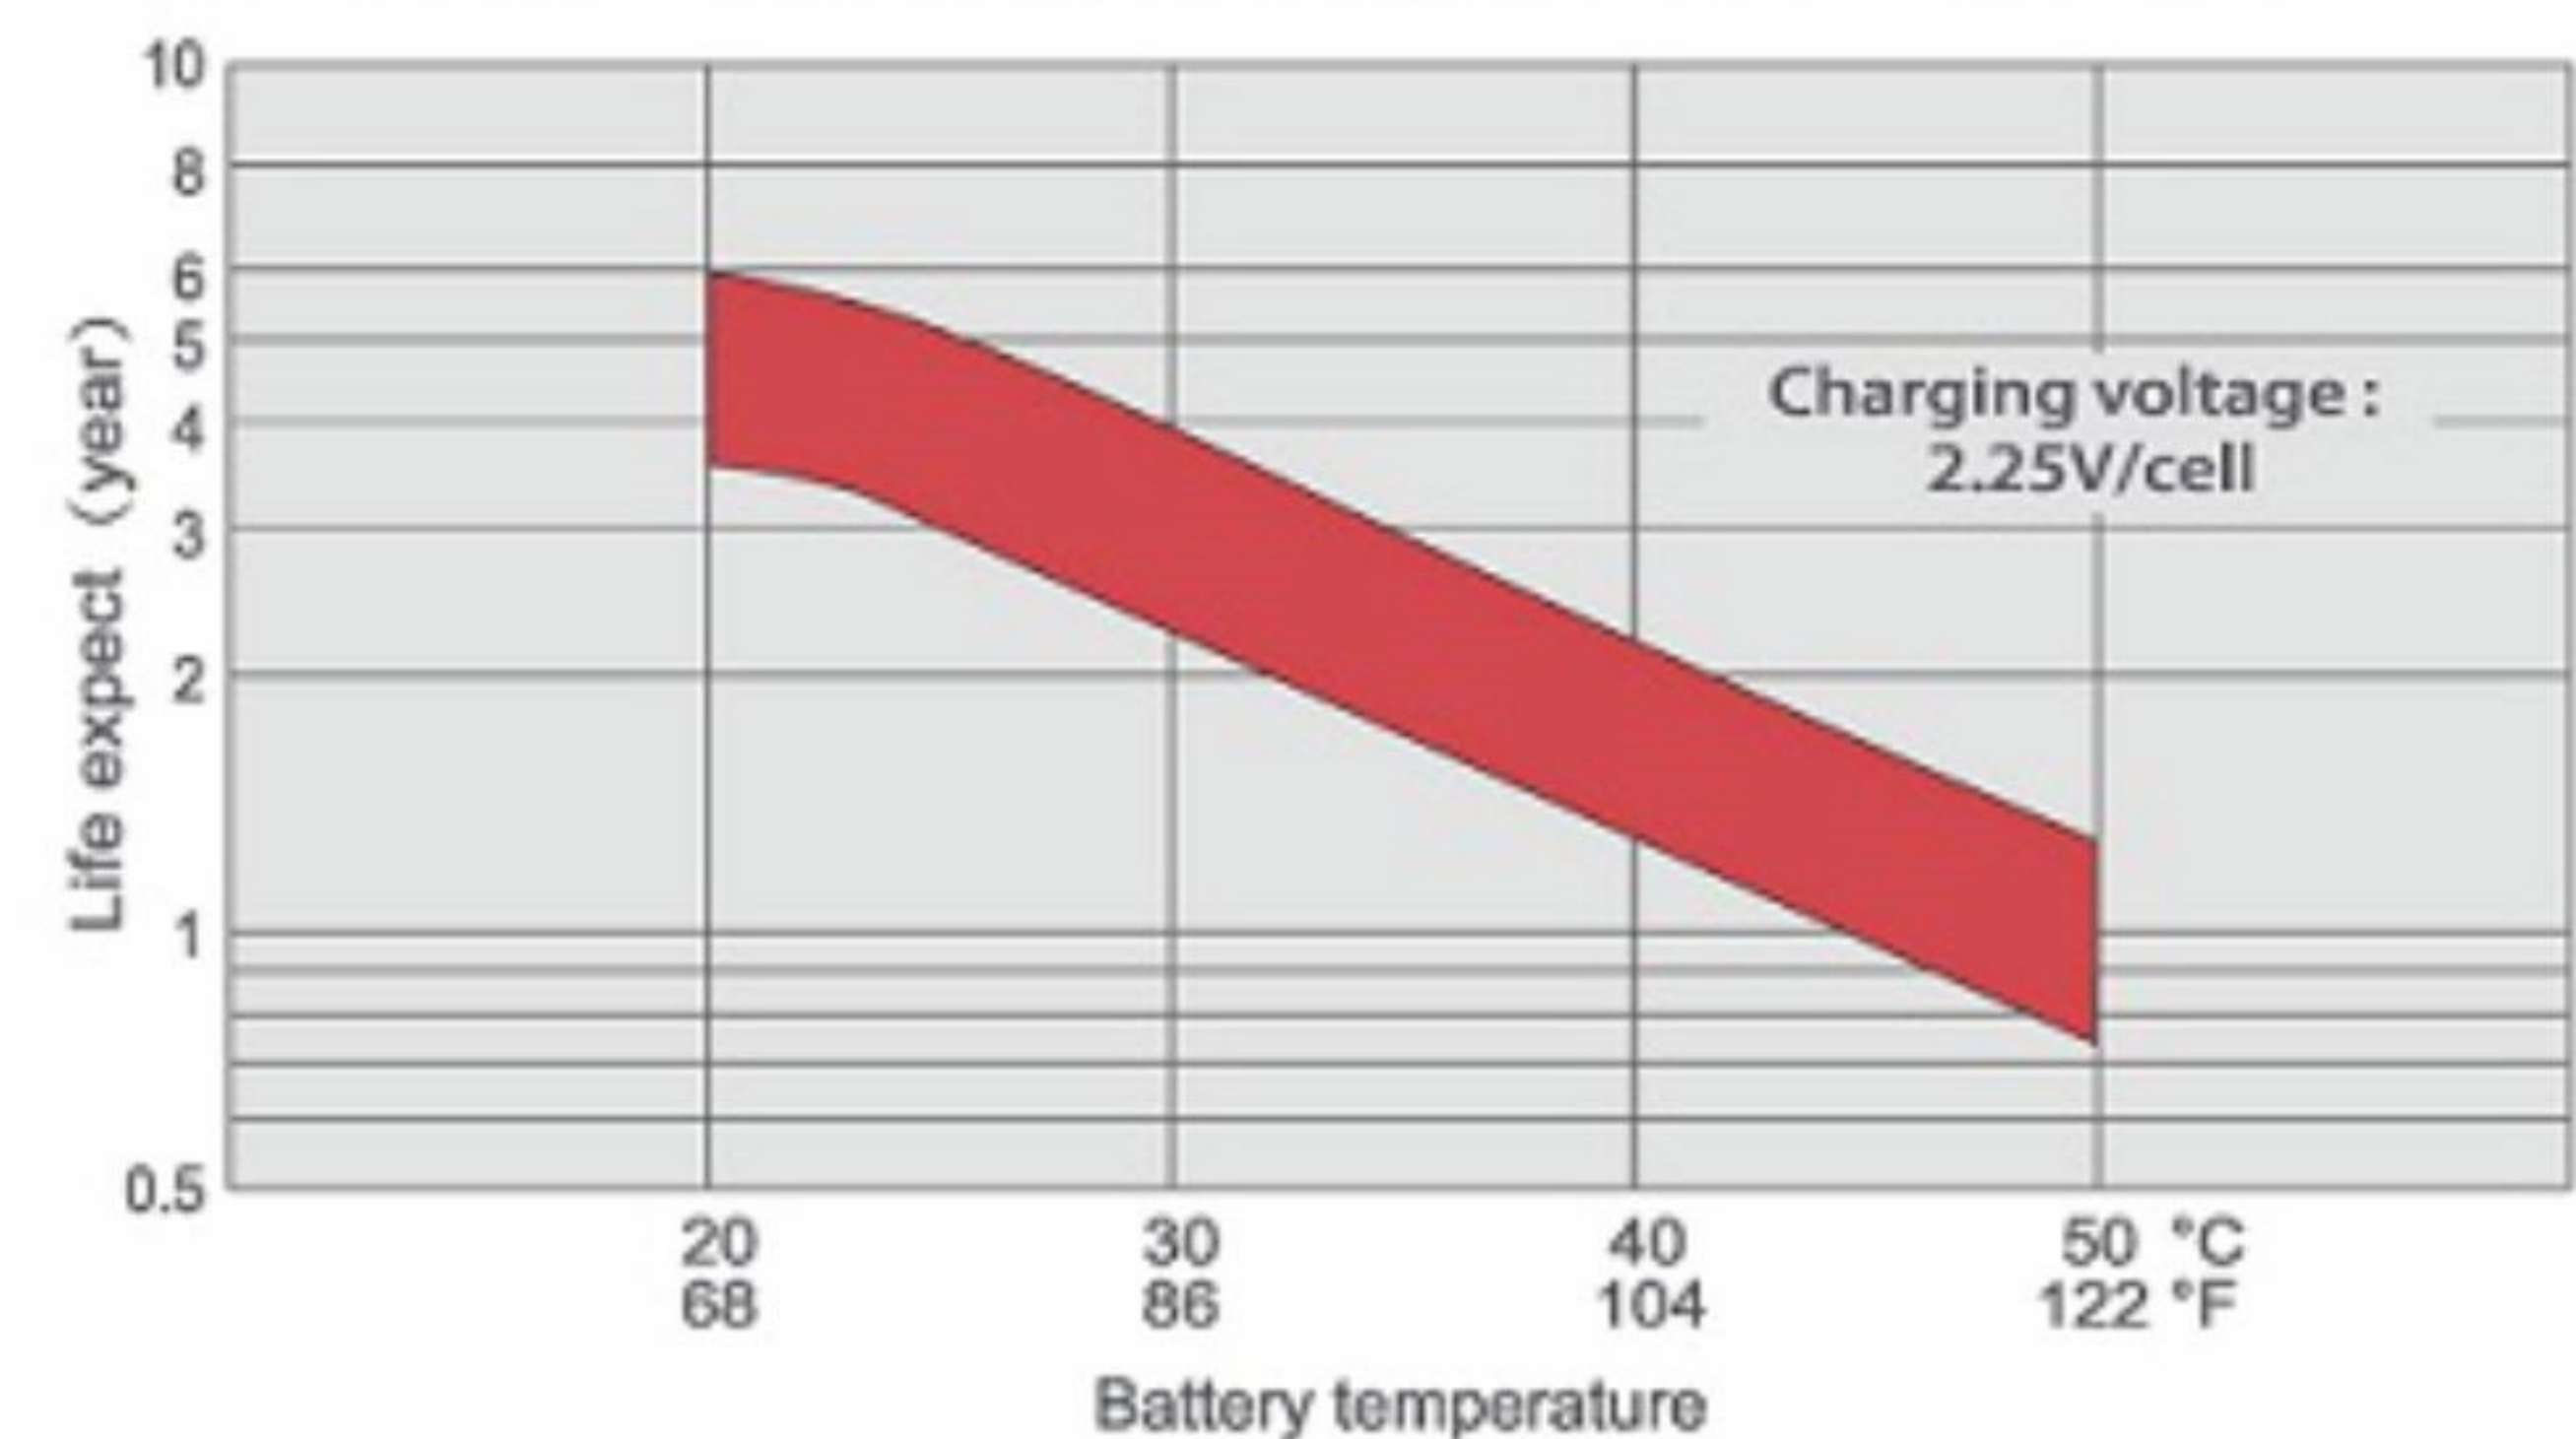


自放电特性

Self Discharge Characteristics

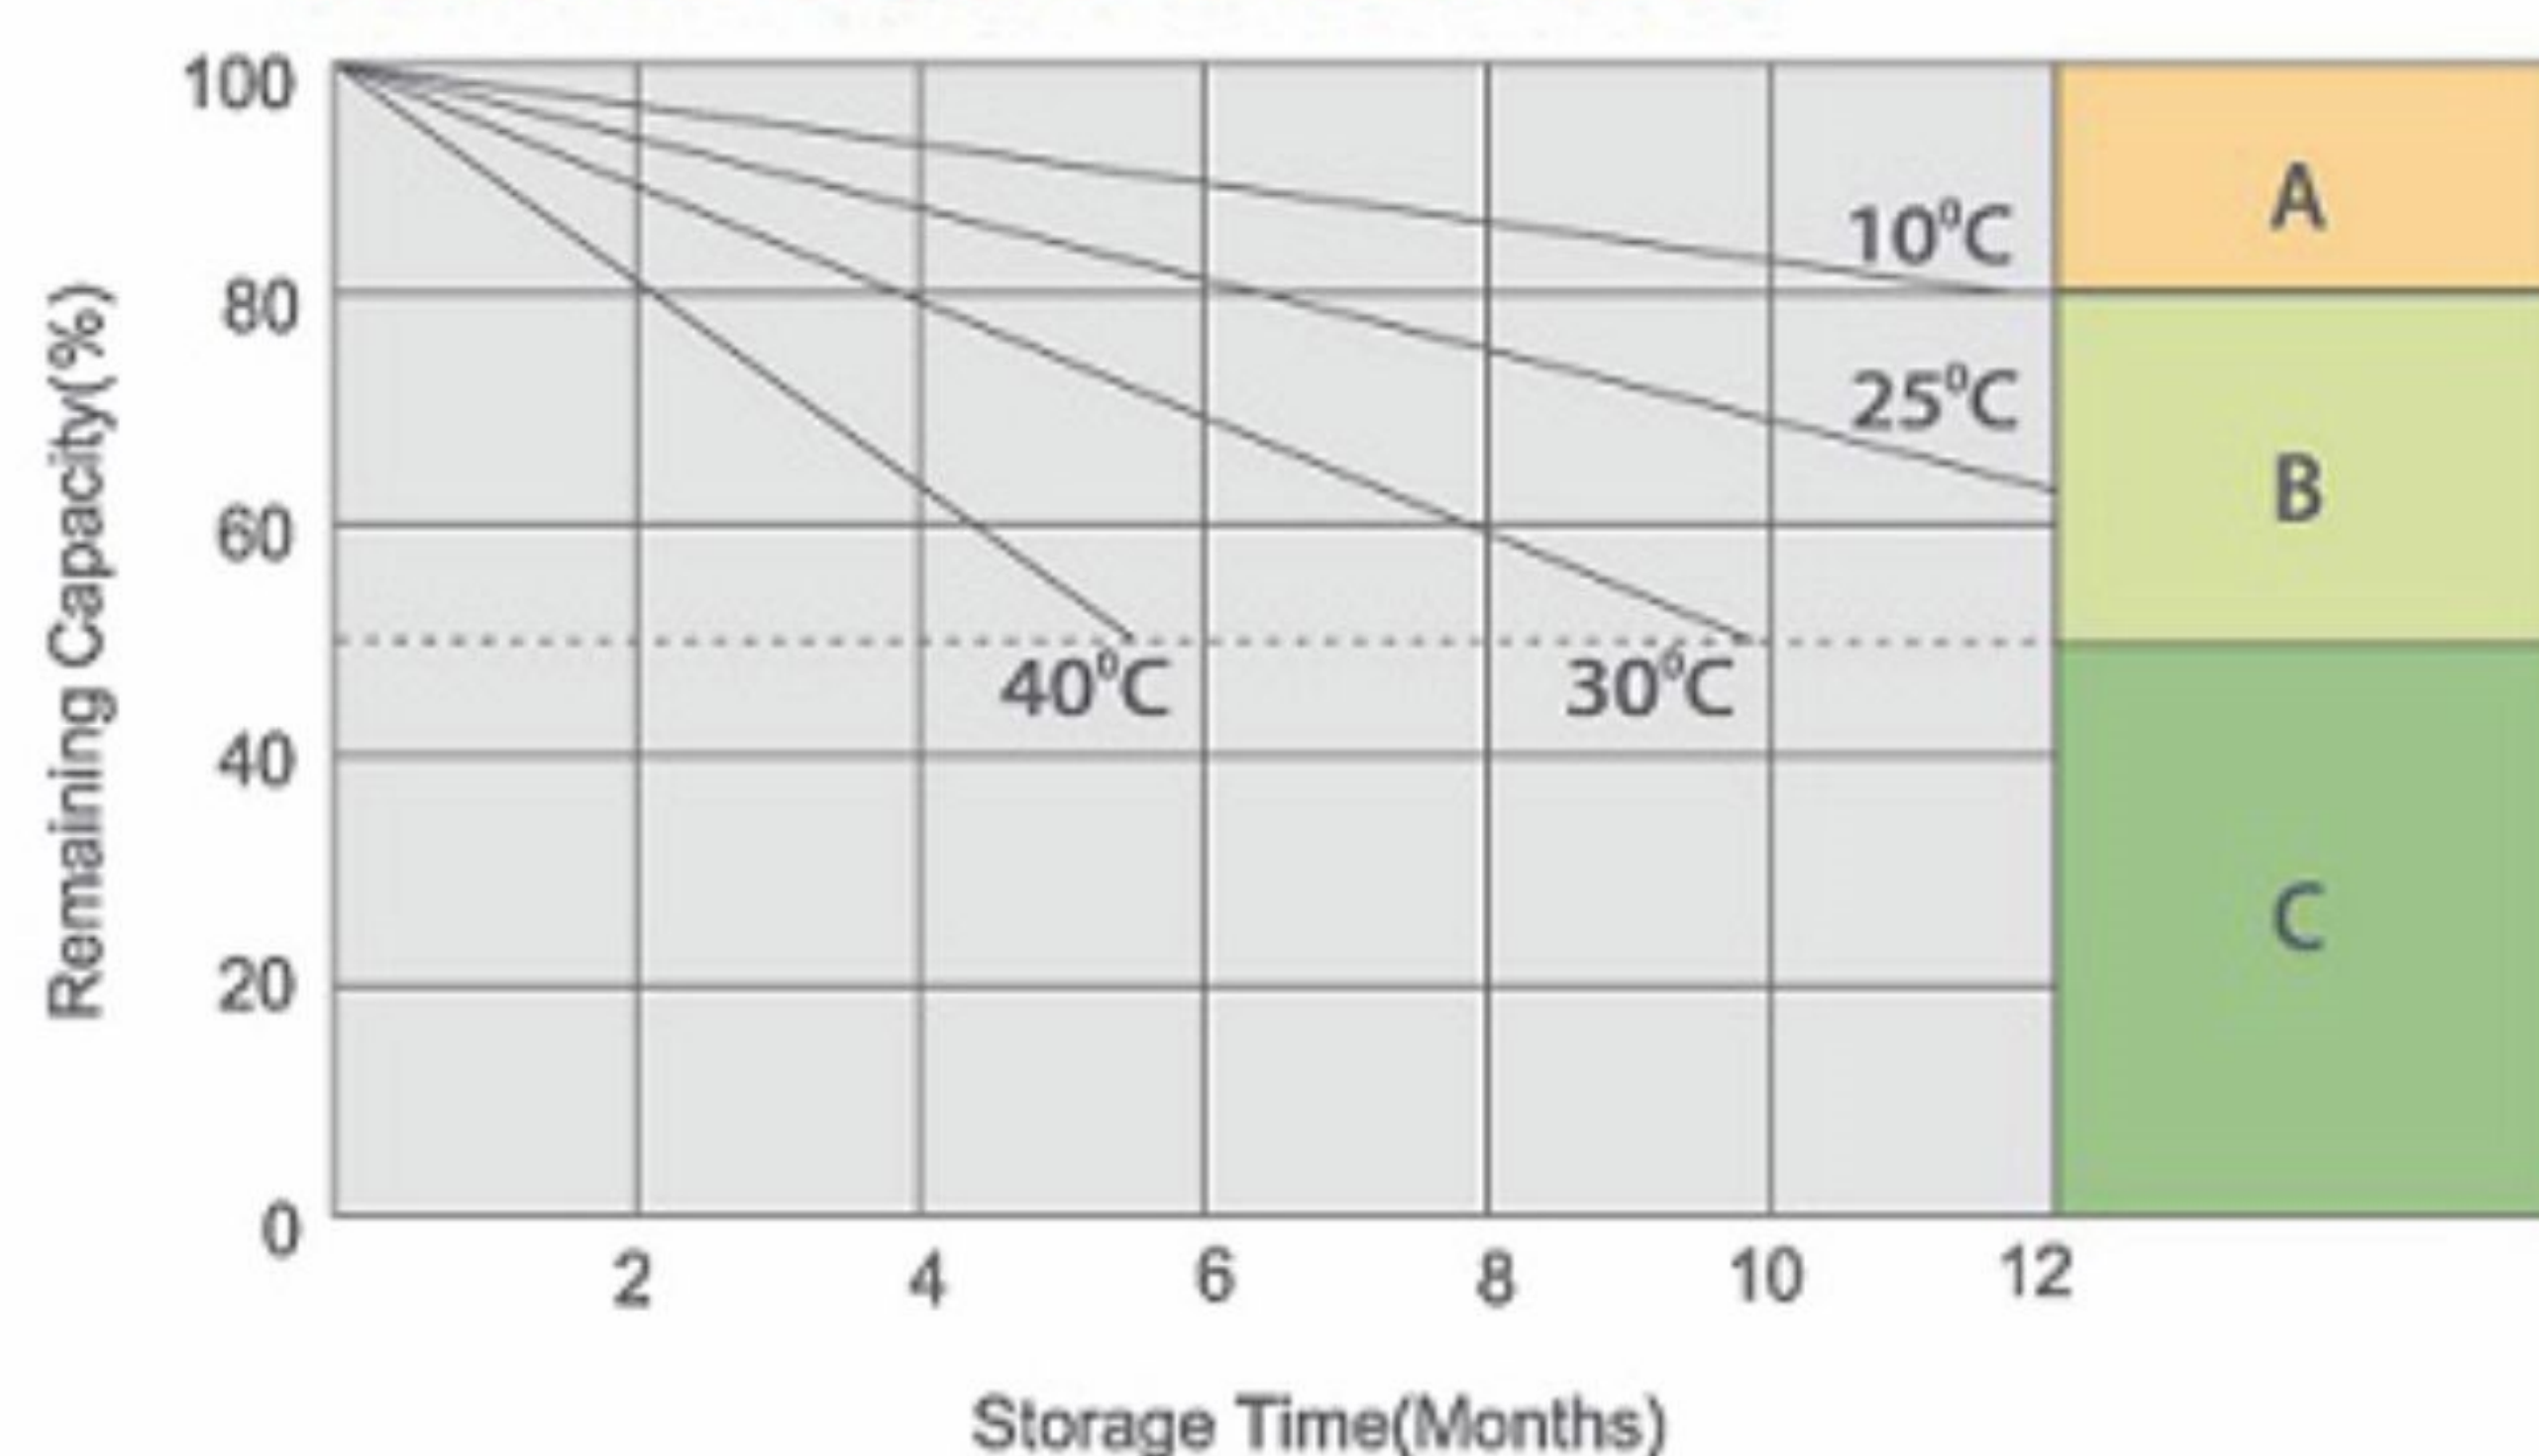

深度放电与循环寿命

Cycle Life in Relation to Depth of Discharge

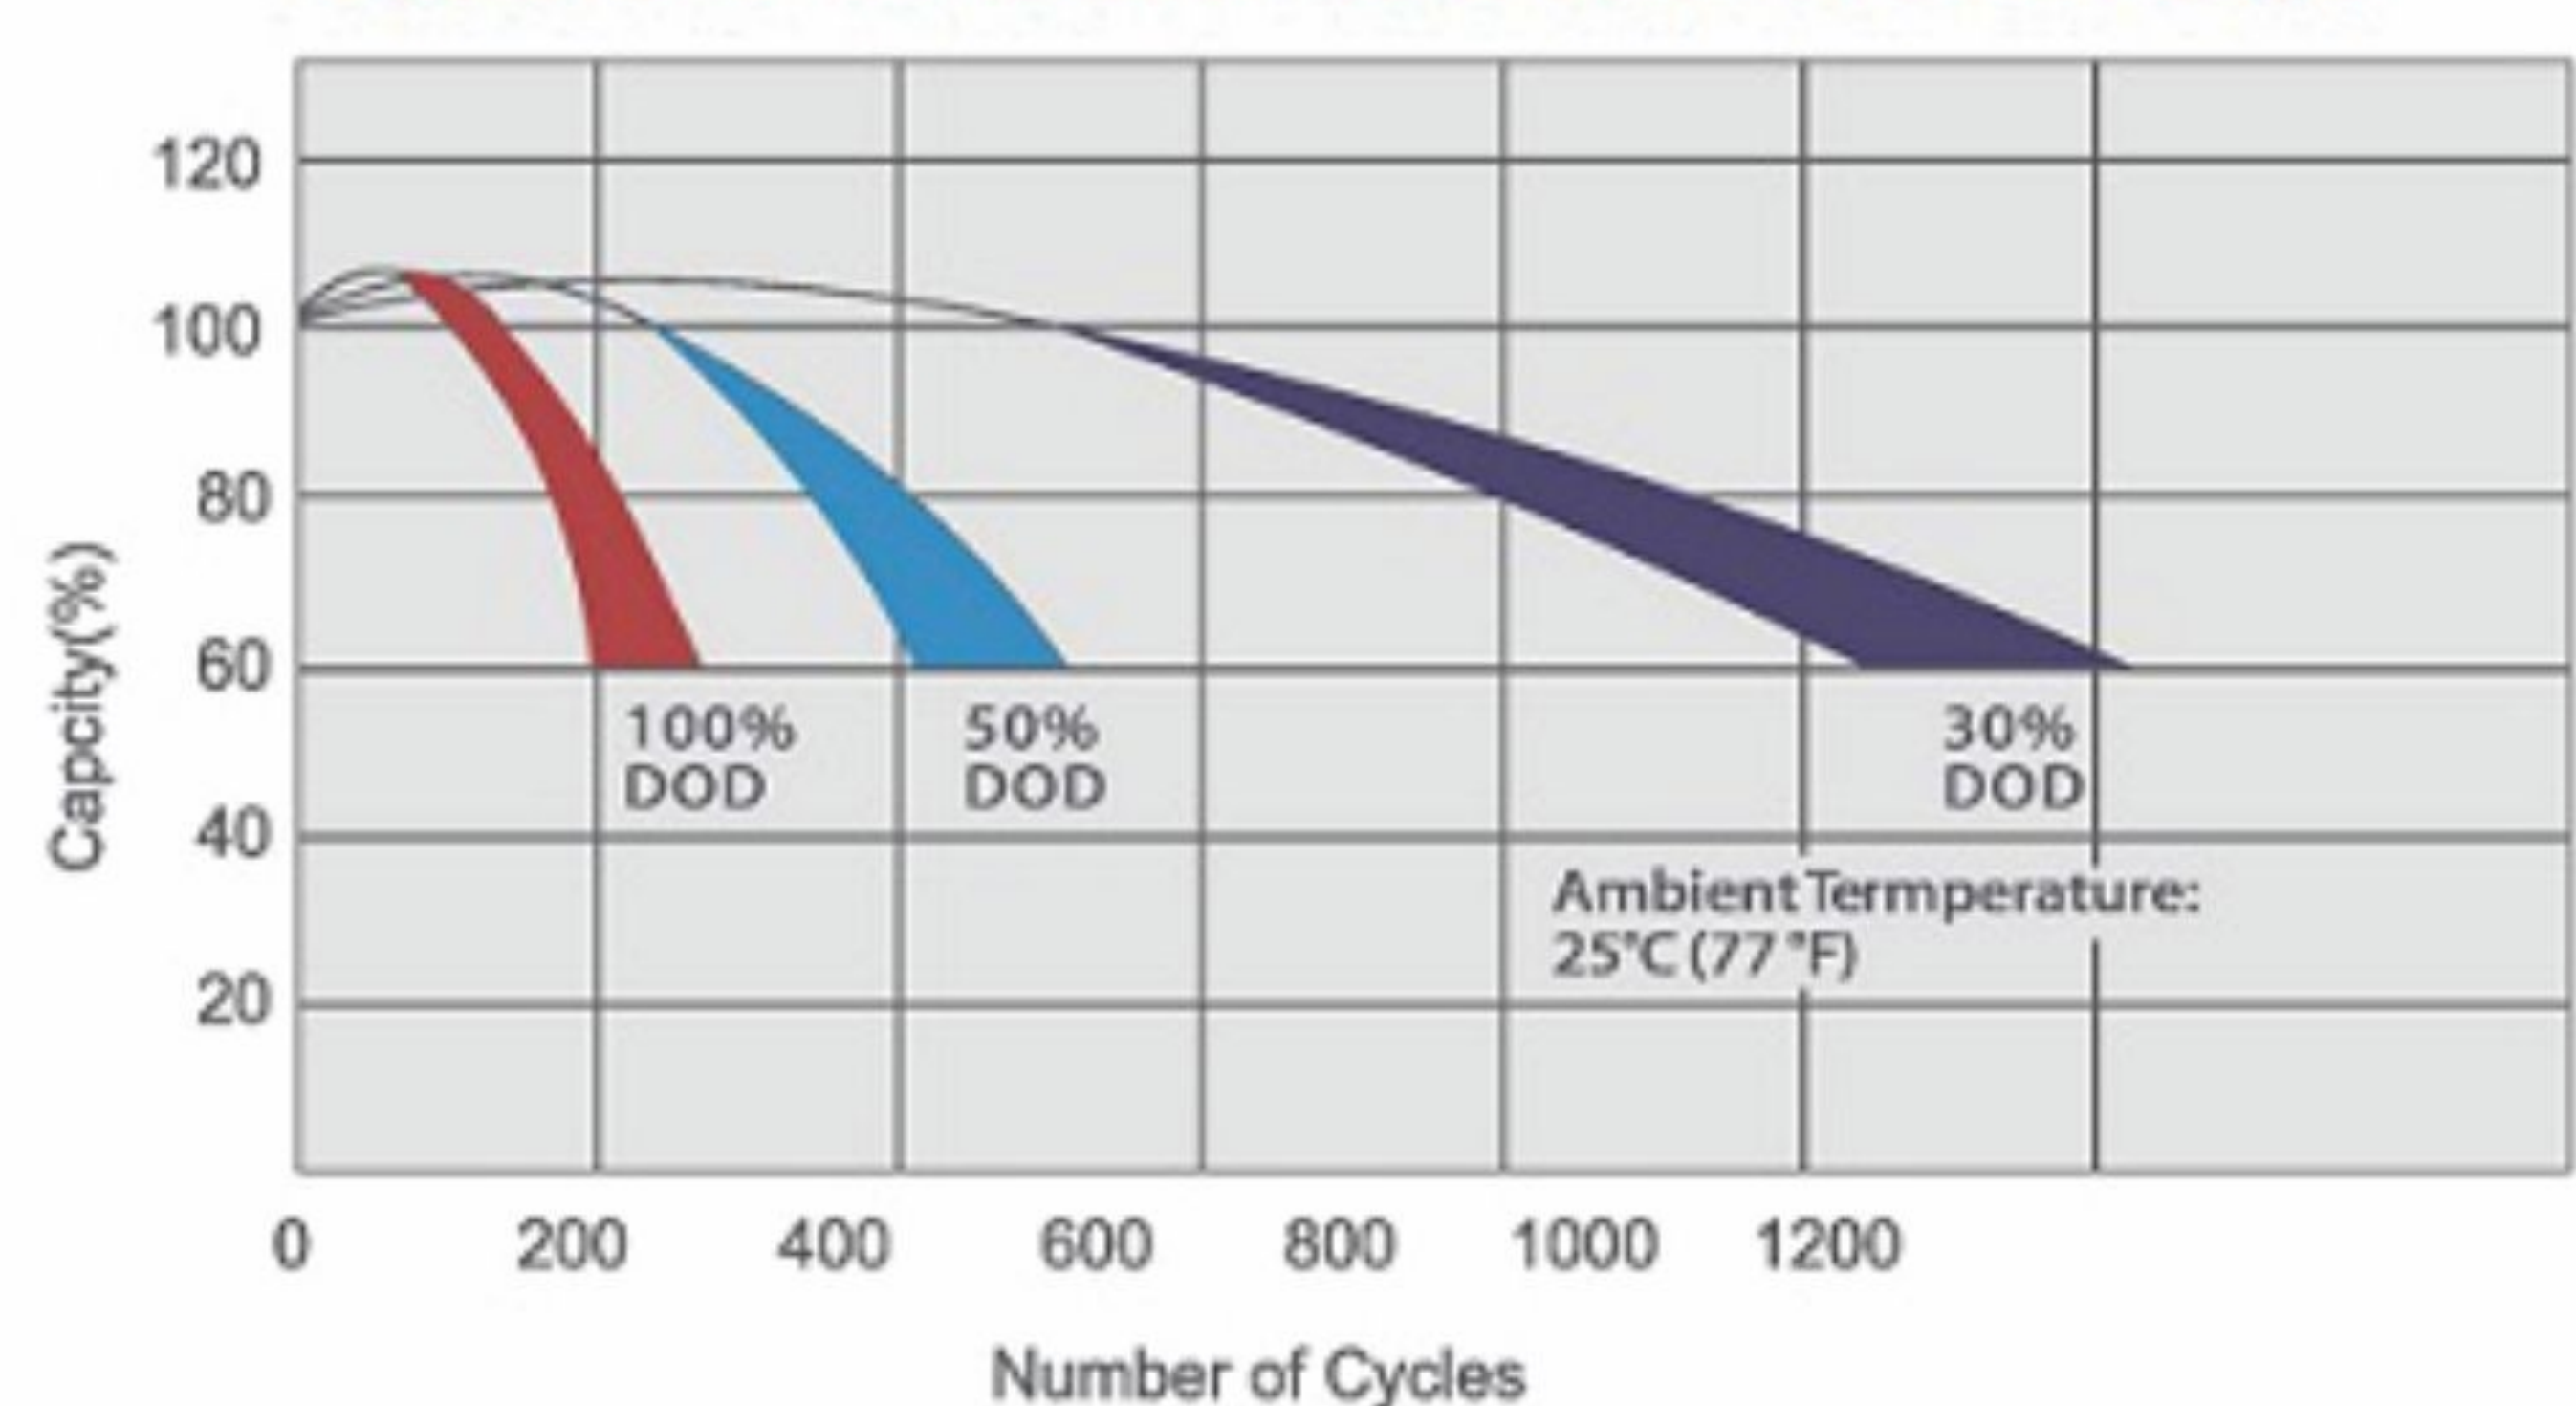

A No supplementary charge required (Carry out supplementary charge before use if 100% capacity is required.)
无需充电 (如需 100% 容量, 使用前请补充电)

B Supplementary charge required before use. Optional charging way as below:
使用以下方法充电;

1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
用限流 0.25CA 和恒压 2.25V/ 单格充电 3 天以上;
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
用限流 0.25CA 和恒压 2.45V/ 单格充电 20 小时以上;
3. Charged for 8-10 hours at limited current 0.05CA
用限流 0.05CA 充电 8-10 小时;

C Supplementary charge may often fail to recover the capacity.
补充电无法恢复电池容量;
The battery should never be left standing till this is reached.
须避免出现这种情况发生;

Testing condition:

Discharging: current 0.17C (FV 1.7V/cell);
Charging: current 0.25C max, voltage 2.45V/cell;
Charging volume: 125% of discharged capacity.

型 号	电压	容量	规格(±2mm)				重量	个/箱	箱规 (cm)		
	(V)	(Ah)	长	宽	高	总高	千克		长	宽	高
6-GFM-12004	12	4	90	70	102	107	1.6	10	28.5	23.5	14
6-GFM-12007	12	7	151	65	94.5	99	2.14	10	31.5	21	14.5
6-GFM-12009	12	9	151	66	94.5	99	2.4	10	31.5	21	14.5
6-GFM-12012	12	12	151	98	95	99	4	4	32	31.55	15
6-GFM-12017	12	17	181	76	166	167	5.3	4	32.5	19.5	22.5
6-GFM-12024W	12	24	175	165	126	126	7.4	2	38	18	18
6-GFM-12024L	12	24	165	125	175	180	7.4	2	28	18.5	22
6-GFM-12030	12	30	197	165	177	177	10.6	2	36.5	20.5	23
6-GFM-12033	12	33	196	131	155	180	10.3	2	28	19.5	21
6-GFM-12038	12	38	197	165	177	177	11	2	36.5	20.5	23
6-GFM-12040	12	40	198	166	172	172	13.06	2	36.5	20.5	23
6-GFM-12050	12	50	229	138	208	228	16.1	1	25	16.3	27.5
6-GFM-12055	12	55	229	138	208	227	16.1	1	25	16.3	27.5
6-GFM-12065	12	65	348	166	178	178	19.36	1	34.5	18.5	22.5
6-GFM-12070	12	70	259	169	208	227	19.2	1	28.4	18.5	27.6
6-GFM-12075	12	75	260	169	208	227	21.2	1	28.4	18.5	27.6
6-GFM-12100	12	100	328	172	214	243	29.5	1	37.5	21.5	28.2
6-GFM-12120	12	120	406	174	208	233	34	1	42.5	20.5	28
6-GFM-12150	12	150	483	170	241	241	42	1	50.5	18.5	32
6-GFM-12200	12	200	522	240	219	244	57.6	1	54.2	26.2	30
6-GFM-12250	12	250	520	268	220	249	74	1	54	29	30
6-GFM-02100	2	100	171	72	205	230	5.6	4	30	17.3	24.5
6-GFM-02200	2	200	172	111	328	365	13.5	2	24	18	41
6-GFM-02300	2	300	171	151	330.5	366.5	21.4	2	18	16	41
6-GFM-02400	2	400	206	175	332	365	26	1	21.5	18	41
6-GFM-02500	2	500	241	172	331	365	31.6	1	24.5	17.5	41
6-GFM-02600	2	600	301	175	331	366	38.7	1	31.5	18	41.3
6-GFM-02800	2	800	410	175	330	365	50	1	41.5	18	41
6-GFM-21000	2	1000	475	175	328	365	63	1	49	18	41
6-GFM-21500	2	1500	401	351	342	378	70	1	Wood Carton		
6-GFM-22000	2	2000	491	350	344	383	110	1	Wood Carton		
6-GFM-23000	2	3000	712	350	341	382	185	1	Wood Carton		